

**PARAG**<sup>®</sup>  
*Weld*

# WELDING WITH A NEW SKILL



**PARAG**

Electrodes Agencies Pvt. Ltd.

We value your trust

## PROFILE

**Parag Traders** was established in GIDC, Vatva, Ahmedabad in 1980 by Mr. Parag Mashruwala to cater the requirements of Welding and Cutting Industries situated in Ahmedabad.

As On Today Parag Traders is known as "**PARAG ELECTRODES AGENCIES PRIVATE LIMITED**"

In the year 1990, We were appointed exclusive stockiest of "**MODI ARC ELECTRODES COMPANY, Modinagar (U.P.)**". Which is the forefront of welding technology in India for over Six Decades.

With our Continuous hard work and effort of our R&D Team one of the biggest milestone achieved by developing our own brand "**PARAGWELD**" for Welding and Cutting Equipment's

**The products covered under our own brand "PARAG WELD" are as follows.**

- » **Inverter Based Welding Machines**
- » **Inverter Based Plasma Cutting Machines**
- » **Mild Steel Copper Coated Mig Welding Wire**
- » **Flux Cored Mig Welding Wires**
- » **Flux Coated Welding Electrodes**
- » **Robotic Welding and Cutting Equipments**
- » **CNC Flame and Plasma Cutting Equipment**
- » **Automatic Special Purpose Machinery for Welding & Cutting**


## OUR VISION

Our vision is to build an organization which will be seen as the reliable source of welding and cutting equipment with well equipped in-house service station.

## OUR MISSION

**PARAG ELECTRODES AGENCIES PRIVATE LIMITED** is in the business of Sales and Service provider of welding and cutting equipment. Our Mission is to continuously keep improving services and products, thereby providing effective solutions to our customers.

WE  
VALUE  
YOUR  
TRUST

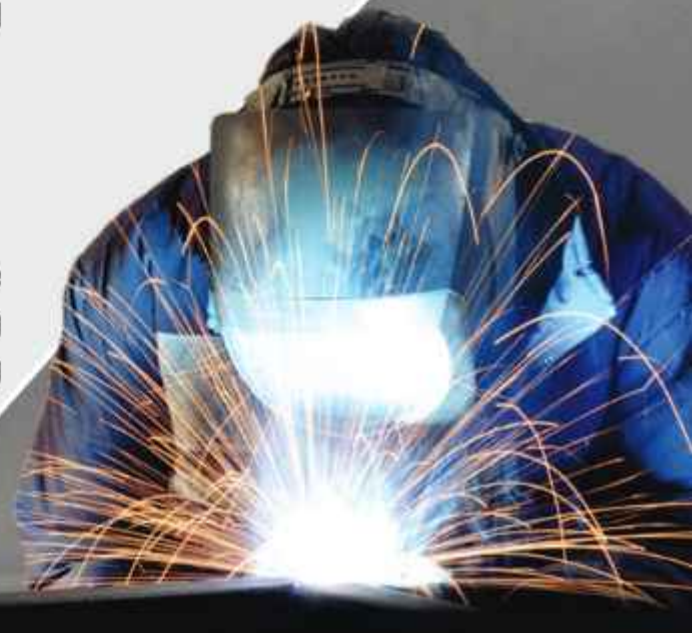



## **INDEX**

01-02  
ARC WELDER SERIES

---

03-04  
TIG/MMA WELDER SERIES

---

05  
PULSE TIG/MMA AC/DC WELDER SERIES

---

06-07  
MIG/MMA WELDER SERIES

---

08-09  
LGK AIR PLASMA CUTTER SERIES

---

10-11  
SUBMERGED ARC WELDER SERIES

---

12-14  
SPECIAL PURPOSE MACHINERY FOR WELDING & CUTTING

---

15  
ECO CNC FLAME & PLASMA CUTTING MACHINE

---

16  
GANTRY TYPE CNC AIR PLASMA AND  
FLAME CUTTING MACHINE

---

16  
CNC FIBER LASER CUTTING MACHINE

---

17  
WELDING & CUTTING CONSUMABLES & ACCESSORIES



## **ARC WELDER SERIES**

### **FEATURES**

Manual Metal Arc Welding, also known as shielded Metal Arc Welding, Flux Shielded Arc Welding or informally as stick welding, is a manual arc welding process that uses a consumable electrode coated with flux to lay the weld. An electrode current, in the form of either AC or DC from a welding power supply, is used to form an electric arc between the electrode and the metal to be joined.

Because of the versatility of the process and the simplicity of its equipment and operation, shielded metal Arc welding is one of the world's most popular welding processes. The process is used primarily to weld steels (including stainless steel) but Aluminium, Nickel and Copper Alloys can also be welded with this method.

# ARC WELDER SERIES

**PARAG**<sup>®</sup>  
*Weld*



PARAMETERS	ARC 200	ARC 300 GS	ARC 300 G	ARC 400 G/400 I	ARC 630I	ARC 1000
Phase	Single	Single	Three	Three	Three	Three
Input Voltage (V <sub>in</sub> )	AC 220V ± 15%	AC 220V ± 15%	AC 415V ± 15%	AC 415V ± 15%	AC 415V ± 15%	AC 415V ± 15%
Input Frequency (Hz)	50/60	50/60	50/60	50/60	50/60	50/60
Rated Input Power (kVA)	6.1	10.2	9.4	17.15	35.89	45.13
Rated Input Current (Amp)	30	44	20	23.9	50	63
Output Current Range (A)	20-200	20-300	20-300	40-400	40-630	40-1000
Rated Output Voltage (V)	76	76	76	76	85	90
Force Range (A)	NA	NA	0-100	0-100	0-100	0-100
Duty Cycle (%)	60	60	60	60	100	100
No Load Loss (W)	40	40	50	100	150	240
Efficiency (%)	80	85	85	85	85	85
Power Factor	0.93	0.93	0.93	0.93	0.93	0.93
Insulation Grade	F	F	F	F	F	F
Housing Protection Grade	IP21	IP21	IP21	IP21	IP21	IP23S
Electrode Dia. (mm)	1.6 - 3.15	1.6 - 3.15	1.6 - 3.15	1.6 - 5.00	1.6 - 6.30	1.6 - 6.30
Weight (Kg)	8	9	17.5	22	54	85
Dimension (mm)	395 x 153 x 301	420 x 150 x 240	455 x 202 x 372	515 x 262 x 468	670 x 320 x 640	740 x 385 x 690



## **TIG/MMA WELDER SERIES**

### **FEATURES**

Tungsten Inert Gas (TIG) Welding, also known as Gas Tungsten Arc Welding (GTAW), is an Arc welding process that uses a non-consumable tungsten electrode to produce the weld. The weld area is protected from atmospheric contamination by a shielding gas (usually an inert gas such as argon), and a filler is normally used. A constant-current welding power supply produces energy which is conducted across the arc through a column of highly ionized gas & metal vapors known as a plasma.

GTAW is most commonly used to weld thin sections of stainless steel and non-ferrous metals such as aluminum, magnesium and copper alloys. The process grants the operator greater control over the weld than competing processes such as shielded metal arc welding & gas metal arc welding, allowing for stronger, higher quality welds. However, GTAW is comparatively more complex and difficult to master, and furthermore, it is significantly slower than most other welding techniques. A related process, Plasma Arc Welding, uses a slightly different welding torch to create a more focused welding arc & as a result is often automated.

# TIG/MMA WELDER SERIES

**PARAG**  
Weld<sup>®</sup>



PARAMETERS	TIG 200 A	TIG 250 A	TIG 400 IJ	TIG 630 IJ
Phase	Single	Three	Three	Three
Input Voltage (Vin)	AC 220V ± 15%	AC 415V ± 15%	AC 415V ± 15%	AC 415V ± 15%
Input Frequency (Hz)	50/60	50/60	50/60	50/60
Rated Input Power (kVA)	9.46	12	20	26 & 18
Rated Input Current (Amp)	43 & 26	16.69	27.6 & 29	27.6 & 29
No Load Voltage (V)	56	62	68	68
Output Current Range (A)	10 - 200	10-250	10-400	10-600
Rated Output Voltage (V)	28 & 18	32 & 22	36 & 26	36 & 26
No Load Loss (W)	40	60	45	45
Duty Cycle (%)	60	60	60	60
Efficiency (%)	80	85	85	85
Arcing Way	High Frequency ARC	High Frequency ARC	High Frequency ARC	High Frequency ARC
Power Factor	0.73	0.93	0.93	0.93
Insulation Grade	F	F	F	F
Housing Protection Grade	IP21	IP21	IP21	IP21
Wire & Electrode Dia. (mm)	1.6-2.0 & 1.6-3.15	1.6-3.15 & 1.6 - 3.15	1.6-4.0 & 1.6-5.0	1.6-5.0 & 1.6-6.3
Weight (Kg)	10	16	24	45
Dimension (mm)	395 x 153 x 301	505 x 203 x 375	550 x 280 x 245	580 x 300 x 250

# PULSE TIG/MMA AC/DC WELDER SERIES

**PARAG**  
Weld®



PARAMETERS	TIG 400 P	TIG 200 P AC/DC	TIG 315 P AC/DC	TIG 400 P AC/DC
Phase	Three	Single	Three	Three
Input Voltage (V <sub>in</sub> )	AC 415V ± 15%	AC 220V ± 15%	AC 415V ± 15%	AC 415V ± 15%
Input Frequency (Hz)	50/60	50/60	50/60	50/60
Rated Input Power (kVA)	12.9 & 8.9	12.9 & 8.9	12.9 & 8.9	23 & 16
Rated Input Current (Amp)	19.6 & 13.5	19.6 & 13.5	19.6 & 13.5	27.6 & 20
No Load Voltage (V)	54	54	54	68
Output Current Range (A)	10-400	10-315	10-315	10-400
Rated Output Voltage (V)	22.6	22.6	22.6	36 & 26
No Load Loss (W)	50	50	50	45
Duty Cycle (%)	60	60	60	60
Efficiency (%)	85	85	85	85
Arcing Way	High Frequency ARC			
Power Factor	0.93	0.93	0.93	0.93
Insulation Grade	F	F	F	F
Housing Protection Grade	IP21	IP21	IP21	IP21
Wire & Electrode Dia. (mm)	1.6-4.0 & 1.6-4.0	1.6-3.15 & 1.6-3.15	1.6-3.15 & 1.6-3.15	1.6-3.15 & 1.6-4.0
Weight (Kg)	28	30	30	25
Dimension (mm)	570 x 364 x 540	570 x 364 x 540	570 x 364 x 540	478 x 328 x 302



## **MIG/MMA WELDER SERIES**

### **FEATURES**

Metal Inert Gas (MIG) Welding or Metal Active Gas (MAG) Welding, also known as Gas Metal Arc Welding (GMAW) is a semi-automatic or automatic arc welding process in which a continuous and consumable wire electrode and a shielding gas are fed through a welding gun. A constant voltage, DC power source is most commonly used with MIG/MAG, but constant current systems, as well as AC, can be used. There are four primary methods of metal transfer in MIG/MAG, called globular, short-circuiting, spray and pulsed-spray, each of which has distinct properties and corresponding advantages & limitations.

The process became highly used in industry. Today, MIG/MAG is the most common industrial welding process, preferred for its versatility, speed and the relative ease of adapting the process to robotic automation. Unlike welding processes that do not employ a shielding gas, such as MMA, it is rarely used outdoors or in other areas of air volatility. A related process, flux cored arc welding, often does not utilize shielding gas, instead employing a hollow electrode wire that is filled with on the inside.

# MIG/MMA WELDER SERIES

**PARAG**  
Weld



PARAMETERS	MIG 200 G	MIG 250 F	MIG 400 Pro	MIG 500 Pro
Phase	Single	Three	Three	Three
Input Voltage (Vm)	Ac230±15%	AC 415V ± 15%	AC 415V ± 15%	AC 415V ± 15%
Input Frequency (Hz)	50-60	50/60	50/60	50/60
Rated Input Power (kVA)	8.4	7.89	11.1	19.5
Rated Input Current (Amp)	9	11	26	37.5
No Load Voltage (V)	56	56	65	65
Output Current Range (A)	50-200A	40-250	40-400	50-500
Rated Output Voltage (V)	11-22.50	14-26.5	31.5	39
Duty Cycle (%)	60	60	100	100
Efficiency (%)	85	85	85	85
Power Factor	0.93	0.93	0.93	0.93
Insulation Grade	F	F	F	F
Housing Protection Grade	IP21	IP21	IP21	IP21
Wire Feeding Speed (M/Min)	2.50-11.00	2.50 - 13.00	3.00 - 15.00	3.00 - 15.00
Wire Feeding Mechanism	Inbuilt	External	External	External
Wire Dia (mm)	0.8 - 1.00	0.8 - 1.00	0.8 - 1.2	0.8 - 1.6
Weight (Kg)	21	15	30	36
Dimension (mm)	452 x 250 x 410	505 x 203 x 375	530 x 290 x 450	585 x 315 x 480



## **LGK AIR PLASMA CUTTER SERIES**

### **FEATURES**

Plasma Cutting is a process that is used to cut steel and other metals of different thickness (or sometimes other materials) using a plasma torch. In this process, a compressed air is blown at high speed out of a nozzle; at the same time an electrical arc is formed through that frequency from the nozzle to the surface being cut, turning some of that gas to plasma. The plasma is sufficiently hot to melt the metal being cut and moves sufficiently fast to blow melt metal away from the cut.

# LGK AIR PLASMA CUTTER SERIES

**PARAG**  
Weld



PARAMETERS		LGK 63	LGK 100	LGK 120	LGK 160	LGK 200
Phase		Three	Three	Three	Three	Three
Input Voltage	(Vin)	AC 415V ± 15%	AC 415V ± 15%	AC 415V ± 15%	AC 415V ± 15%	AC 415V ± 15%
Input Frequency	(Hz)	50/60	50/60	50/60	50/60	50/60
Rated Input Power	(kVA)	11	15.8	15.8	32	45
Rated Input Current	(Amp)	14.5	23	24	43	68
No Load Voltage	(V)	308	295	305	320	340
Output Current Range	(A)	25-63	30 - 100	30-120	35-160	40-200
Rated Output Voltage	(V)	105.2	120	128	144	160
Duty Cycle	(%)	60/40°C	80/40°C	80/40°C	100/40°C	100/40°C
No Load Loss	(W)	80	100	100	100	80
Efficiency	(%)	85	90	90	90	90
Power Factor		0.93	0.86	0.86	0.89	0.89
Insulation Grade		F	F	F	F	F
Housing Protection Grade		IP21S	IP21S	IP21S	IP21S	IP21S
Arcing Way		HF (Pilot Arc)	HF (Pilot Arc)	HF (Pilot Arc)	HF (Pilot Arc)	HF (Pilot Arc)
Air Pressure	(HP)	4.0 - 5.0	4.5 - 5.5	4.5 - 5.5	4.5 - 5.5	4.5 - 5.5
Cutting Plate Thick. (Max mm)		1-12 / 1-15	1-20 / 1-30	1.30 / 1.40	1-40 / 1-50	1-60 / 1-70
Cutting Plate Thick. (CNC Dross Free)		8	12	16	18	22
Weight	(Kg)	28.5	35	38	58	75
Dimension	(mm)	580 x 295 x 480	636 x 290 x 535	636 x 290 x 535	720 x 350 x 625	825 X 350 X 735



## **SUBMERGED ARC WELDER SERIES**

### **FEATURES**

- » Advance IGBT inverter technology. Inverter frequency is 20kHz, greatly reducing the volume and weight of the welder.
- » Great reduction in magnetic loss obviously enhances the welding efficiency and energy and energy saving effect.
- » Switching frequency is beyond audio range, which almost eliminates noise pollution.
- » Arc voltage compensation function, providing a good condition for welding.
- » Constant current output and stable arc, ensuring high-quality welding.
- » The power source can be used for submerged arc welding, MMA welding and air carbon arc gouging.

# SUBMERGED ARC WELDER SERIES

**PARAG**  
Weld



PARAMETERS	MZ 1000	MZ 1250
Phase	Three	Three
Input Voltage (V <sub>in</sub> )	AC 415V ± 15%	AC 415V ± 15%
Input Frequency (Hz)	50/60	50/60
Rated Input Power (kVA)	57	79.93
Rated Input Current (Amp)	80	98
No Load Voltage (V)	84	105
Output Current Range (A)	100-1000	100-1250
Rated Output Voltage (V)	44	44
Force Range (A)	0-100	0-10
Duty Cycle (%)	100/40°C	100/40°C
No Load Loss (W)	300	300
Efficiency (%)	88	85
Power Factor	0.93	0.93
Insulation Grade	F	F
Housing Protection Grade	IP21S	IP21
Weight (Kg)	89	92
Electrode Dia (mm)	3.15 - 6.3	3.15 - 6.3
Dimension (mm)	810 x 405 x 805	810 x 405 x 805
Output Cable	70 mm <sup>2</sup>	70mm <sup>2</sup>

TROLLEY SPECIFICATION	(WIRE FEEDER PARAMETERS)
Electrode Diameter (mm)	2.4, 3.2, 4.0, 5.0
Wire Feeding Speed (cm/min)	0-150
Welding Speed (cm/min)	40-250
Vertical Adj. of the Nose (mm)	95
Beam can be lifting height (mm)	120
Horizontal Adj. of the Nose (mm)	+30
Thread (mm)	300
Wheelbase (mm)	350
Volume of Flux Container	10L
Wire Spool Capacity (kg)	30
Dimension (L x W x H) (mm)	1030 x 510 x 930
Weight (kg)	65



## **SPECIAL PURPOSE MACHINERY FOR WELDING & CUTTING**

### **FEATURES**

SPM - Name itself suggest special purpose machine for the customized product.

Welding & Cutting SPM helps to increase Productivity and Repeatable high quality welds. It is a simplified operations provides consistent quality and productivity. Unskilled and Semiskilled operator can operate.

# SPECIAL PURPOSE MACHINERY FOR WELDING & CUTTING

**PARAG**  
Weld



## Gas Cutting Carriage

This Sturdy design is one of the most popular and best-selling carriages in the manufacturing industry. The "PARAGWELD" is an extremely powerful, versatile tractor, specially designed to be compatible with most applications. with the ability to adapt to each process, the machine is very flexible while keeping the operating system simple. This model can also be used for Oxyflame bevel and circle cutting.

## Plasma Cutting Carriage

This Sturdy design is one of the most popular and best-selling carriages in the manufacturing industry. The "PARAGWELD" is an extremely powerful, versatile tractor, specially designed to be compatible with most applications. with the ability to adapt to each process, the machine is very flexible while keeping the operating system simple. This model can also be used for Plasma a bevel and circle cutting.



## Welding Carriage

Universal Carriage is track based non magnetic Carriage designed for various purposes like plasma cutting and welding. XY slide unit having degree of freedom to adjust Angle of torch head and variable speed for cutting/welding speed.

- » Affordable and Portable.
- » Multi-purpose for Welding/Cutting.
- » Smooth Speed Control with DC motor and Drive.
- » Simple Rail connections allows easy changeover.

## Flexible Welding Carriage

Flexible welding Carriage been used for linear seam weld on Tanks, curved beam or steel structure having irregular curve with MIG/MAG welding process.

- » Easy and flexible torch adjustment allows optimal torch position
- » Hand pendant Allows welder to work in a more ergonomic position
- » Programmable weaving options
- » Easy connection with welding inverter



## Magnetic Welding Carriage

Magnetic Welding Carriage allows increasing your production and reducing your welding costs, by providing constant, non-stop travel at a regulated speed and consistent high-quality welds in a fraction of the time.

- » Compact and lightweight design for welding in narrow spaces.
- » Precise cross-slide torch adjustment.
- » Maintenance free, 4-wheel planetary gear drive system.
- » Precise travel speed and torch angle reduces weld defects.

# SPECIAL PURPOSE MACHINERY FOR WELDING & CUTTING

**PARAG**  
Weld

## Column and Boom

Parag Weld delivers compact design welding manipulator. It can support both circumferential and longitudinal welding application from small tube to big tank. Our welding manipulator has maximized both safety and productivity.

- » Quick, accurate motorized operation.
- » Stroke of manipulator range from 1 meter to 6 meter.
- » manipulators have anti-fallen device.
- » Heavy duty table with bearing mounted for rotation or can be mounted on to travel car.



## Special Purpose Robotic Welding Machine

Welding SPM helps to increase productivity and repeatability high quality welds. We provide unique customized solution with delivering high quality products and services that meet or exceed our customer's expectations.

- » Simplified Operations , Consistent Quality and Productivity
- » Precise travel speed and torch angle reduces weld defects
- » Unskilled and Semi Skilled operator can operate.
- » Overlap , On Delay , off Delay, Speed Control and more functions

## Special Purpose Welding Positiner

A welding Positioner grips and rotates the work piece setting up ergonomic working posture during welding, machining and assembly of work pieces for the operator and providing faster and more efficient process. They can provide optimum welding position to achieve quality welds. Welding Positioner allow steel fabrication shops operator to position the jobs for 'down hand' position in the shortest possible time, without the use of cranes and manpower. It is Ideal welding equipment for Flange to pipe joints, cylindrical parts, Flange and Pipe



## Compressor Tank Welding SPM

Automatic Compressor Tank Welding Production Line can be divide in 4 different operation like; longitudinal seam welding machine, end cap assembling spot welding machine, circular seam automatic welding machine and nozzle welding machine. Equipped with conveyor between the 2 stages can be automatised fully automatic plant. One them linear welding SPM provides high speed and leakage proof joints for compressor tank welding.

## Also Covered

Robotic Welding Systems | CNC Welding Robot  
Automation Accessories

# ECO CNC FLAME & PLASMA CUTTING MACHINE



## Centiliver Portable type CNC Flame & Plasma Cutting System



### MACHINE DETAILS

Structure	Made of High-Quality Aluminium Structure with Guide Rail
Plasma Power Sources	Parag Weld, Huayuan, etc.
Linear Guideways	Imported
Rack and Pinion	Helical 2 Module 15x15 mm Rack and Ground Pinion
Controller	FLMC-2100B Plasma Controller
Torch Height Controller	F1621 –Auto Torch Height Controller with Anti-Collision and Arc Voltage
Stepper Motor & Drive	Leadshine Make Stepper Motors and Drive
Drive Mode	Single Drive with Stepper Motor
Rail	Aluminium Guide Rail with Suitable Spare Parts
Torch Lifter	Imported
Nesting Software	Most 2D, FLCHAM, FastCHEM

## Portable Gantry type CNC Flame & Plasma Cutting System



### MACHINE DETAILS

Structure	Made of High-Quality Aluminium Structure with Guide Rail
Plasma Power Sources	Parag Weld, Huayuan, etc.
Linear Guideways	Imported
Rack and Pinion	Helical 2 Module 15x15 mm Rack and Ground Pinion
Controller	FLMC-2100B Plasma Controller
Torch Height Controller	F1621 –Auto Torch Height Controller with Anti-Collision and Arc Voltage
Stepper Motor & Drive	Leadshine Make Stepper Motors and Drive
Drive Mode	Double Drive with Stepper Motor
Rail	Aluminium Guide Rail with Suitable Spare Parts
Torch Lifter	Imported
Nesting Software	Most 2D, FLCHAM, FastCHEM

### Also Covered

Portable Gantry Flame & Plasma Cutting System  
 Portable Gantry Profile Cutting System | Tabletop CNC Plasma Cutting System  
 CNC Plasma Pipe Cutting System

# GANTRY TYPE CNC AIR PLASMA AND FLAME CUTTING MACHINE

**PARAG**  
Weld

**Heavy duty Gantry type  
CNC Flame & Plasma Cutting System**



## MACHINE DETAILS

Structure	Made of High-Quality Mild Steel Structure with Guide Rail
Plasma Power Sources	Parag Weld, Huavyan , Hyertherm, Etc.
Linear Guideways	Imported
Rack and Pinion	Helical 2 Module 25x25 mm Rack and Ground Pinion
Controller	FLMC-2300B Plasma Controller
Torch Height Controller	F1621 –Auto Torch Height Controller with Anti-Collision and Arc Voltage
Motor & Drive	Panasonic / Fuji Make Servo Motors and Drive
Gear Box	Shimpoo or Similar
Rail	High Quality 24 KG-Guide Rail with Suitable Spare Parts
Torch Lifter	Imported
Nesting Software	Most 2D, FLCHAM, FastCHEM

# CNC FIBER LASER CUTTING MACHINE

**Heavy duty Table type  
Fiber Laser Cutting System**



## MACHINE DETAILS

Structure	Made of High-Quality Mild Steel Structure with Guide Rail
Laser Power Sources	IPG Photonics , Raycus , Max Photonics , JPT
Linear Guideways	PMT , Hi-Win
Rack and Pinion	Y.Y.C make Helical Ground Pinion
Controller	CYP- CUT Controller
Cutting Head	RAYCUS Auto Focus Head
Software	FS-CUT Nesting Software
Motor & Drive	Panasonic / Fuji Make Servo Motors and Drive
Gear Box	Shimpoo or Similar
Cooling System	Water Chillar
Torch Lifter	Imported
Nesting Software	Most 2D, FLCHAM, FastCHEM

### Also Covered

Heavy Duty Tabletop CNC Plasma Cutting System | CNC Plasma Pipe Cutting System  
Heavy Duty Laser Pipe Cutting System | Heavy Duty Laser Pipe + Plate Cutting System



## **WELDING & CUTTING CONSUMABLES & ACCESSORIES**

### **FEATURES**

One of the key requirements in welding and cutting production is consistency, high and reproducible product quality, using optional freestanding support accessories and its consumables allows one to weld or cut smoothly and faster.

# COPPER COATED MIG WELDING WIRE AWS ER70S-6

**PARAG**  
Weld

**PWMAG-1**



## DESCRIPTION

» AWS ER70S-6 is a kind of mild steel copper coated welding wire, suitable for 100% CO<sub>2</sub> and Argon & CO<sub>2</sub> mixed gas protective welding with stable feasibility, good welding seams, less spatters and excellent welding process properties.

WIRE DIAMETER	SPOOL SIZE	NET WEIGHT
0.8 mm	DD 270 mm	15 kg
1.2 mm	DD 270 mm	15 kg
1.6 mm	DD 270 mm	15 kg

# FLUX CORED MIG WELDING WIRE AWS E71T-1

**PWFC71T-1**



## DESCRIPTION

» AWS E71T-1 is the use of titanium-based flux-cored wire welding. Deposited efficient performance of all-position welding process better, legislation can also be welded down.

WIRE DIAMETER	SPOOL SIZE	NET WEIGHT
1.2 mm	DD 270 mm	15 kg
1.6 mm	DD 270 mm	15 kg

# WELDING ELECTRODES

**E-6013 Coated  
Welding Electrodes**



## ADVANTAGES

- » Low Spatter on Mild Steel Plates
- » Low Gas
- » Smooth Welding
- » Easy Flux Chipping

ELECTRODE SIZE	TOTAL PACKET / BOX	NET WEIGHT / BOX
2.50 x 350 mm	4 Pkt (5 Kg Each)	20 kg
3.15 x 350 mm	4 Pkt (5 Kg Each)	20 kg
4.00 x 450 mm	4 Pkt (5 Kg Each)	20 kg
5.00 x 450 mm	4 Pkt (5 Kg Each)	20 kg

# ARC WELDING ACCESSORIES



Welding Holder



Earth Clamp



Ground Clamp



Gauging Torch

# MIG WELDING ACCESSORIES

400 A



500 A



24KD



36 KD



GAS COOLED  
COMPLETE TORCH AND PARTS OF PANASONIC

GAS COOLED  
COMPLETE TORCH AND PARTS OF BINZLE

# TIG WELDING ACCESSORIES

WP 26



WP 18



IMPORTED COMPLETE TORCH AND PARTS

WCD 400



WCD 600



INDIAN MAKE COMPLETE TORCH AND PARTS

# PLASMA CUTTING TORCH ACCESSORIES

**P 80**



**BW 125**



**BW 130**



# OPTIONAL ACCESSORIES



**CNC PLASMA AND FLAME CONTROLLER**



**Welding Machine Trolley**



**WATER COOLING SYSTEM**



**TIG COLD WIRE FEEDER**

**BUILD  
RIGHT  
WELD  
RIGHT**

3, Ganesh Bhuvan, Opp. Bombay Conductor, Near Hotel Samir,  
GIDC Road, Vatva, Ahmedabad-382 445. (Gujarat) India

M: +91-98250 48810, 98240 99621, 9099014043

W : [www.paragweld.com](http://www.paragweld.com)

E : [info@paragweld.com](mailto:info@paragweld.com)

Authorised Stockist



**PARAG**

Electrodes Agencies Pvt. Ltd.

We value your trust



Modiarc Electrodes Co.  
Modinagar (U.P.)



D & H India Limited

