




Exceeding The Limits To Always Get The Best

FEEL

800x3000 MM



CONNECTING THE VALUE OF SLAB


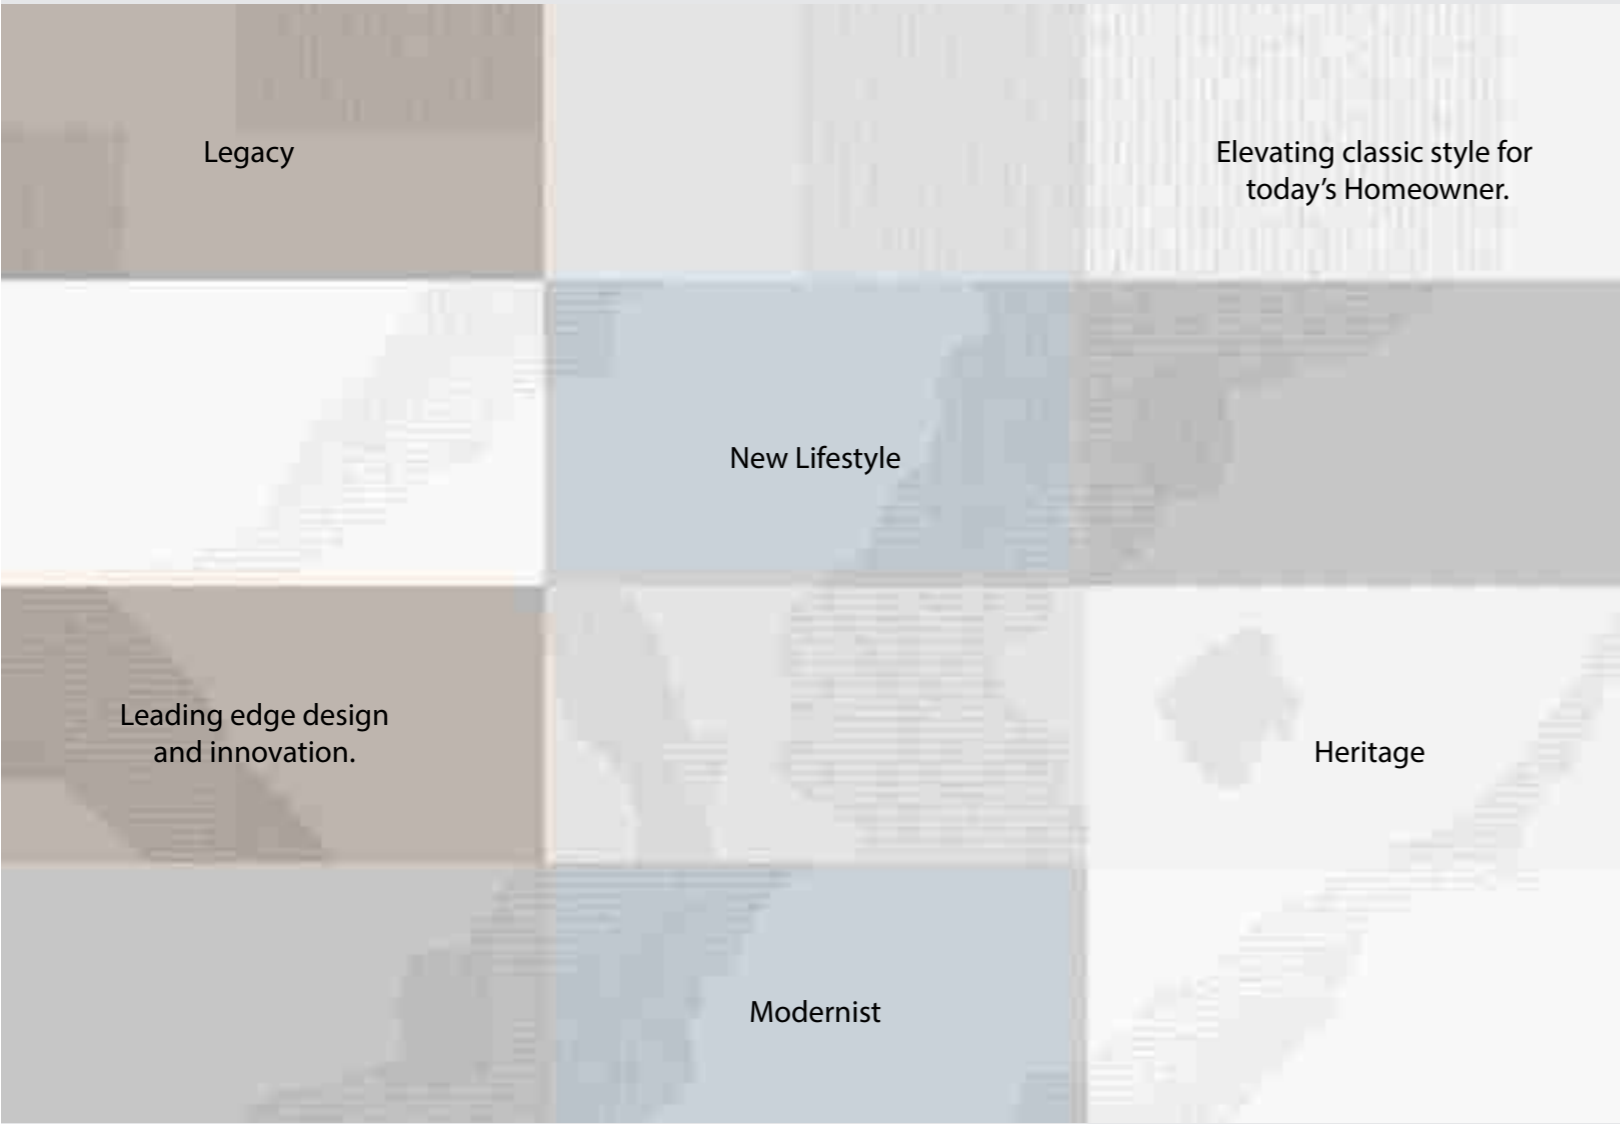


CONTINUA+ is the most efficient, highest-productivity technology for the accurately managed manufacture of ceramic slabs and tiles, also producible with traditional bodies. The slabs are, in fact, formed without using a traditional press or mould, ensuring maximum flexibility in terms of size and thickness.



CONTINUA+ seamlessly integrates the powder forming phase and subsequent digital decoration. The key strengths of this exclusive process are high quality texturing and unrivalled surface shine.

PRODUCT Formats

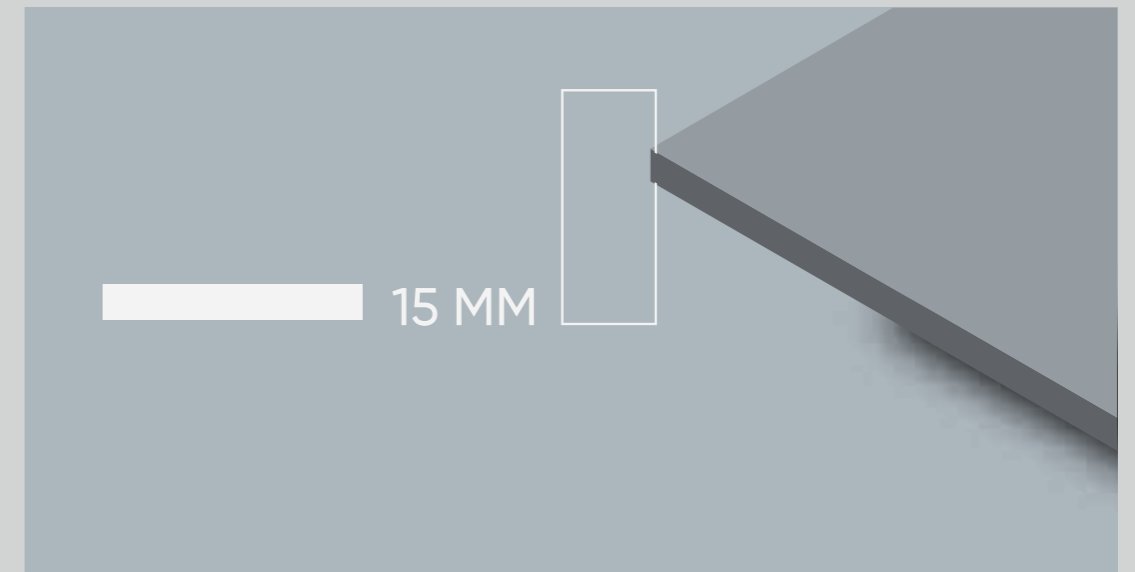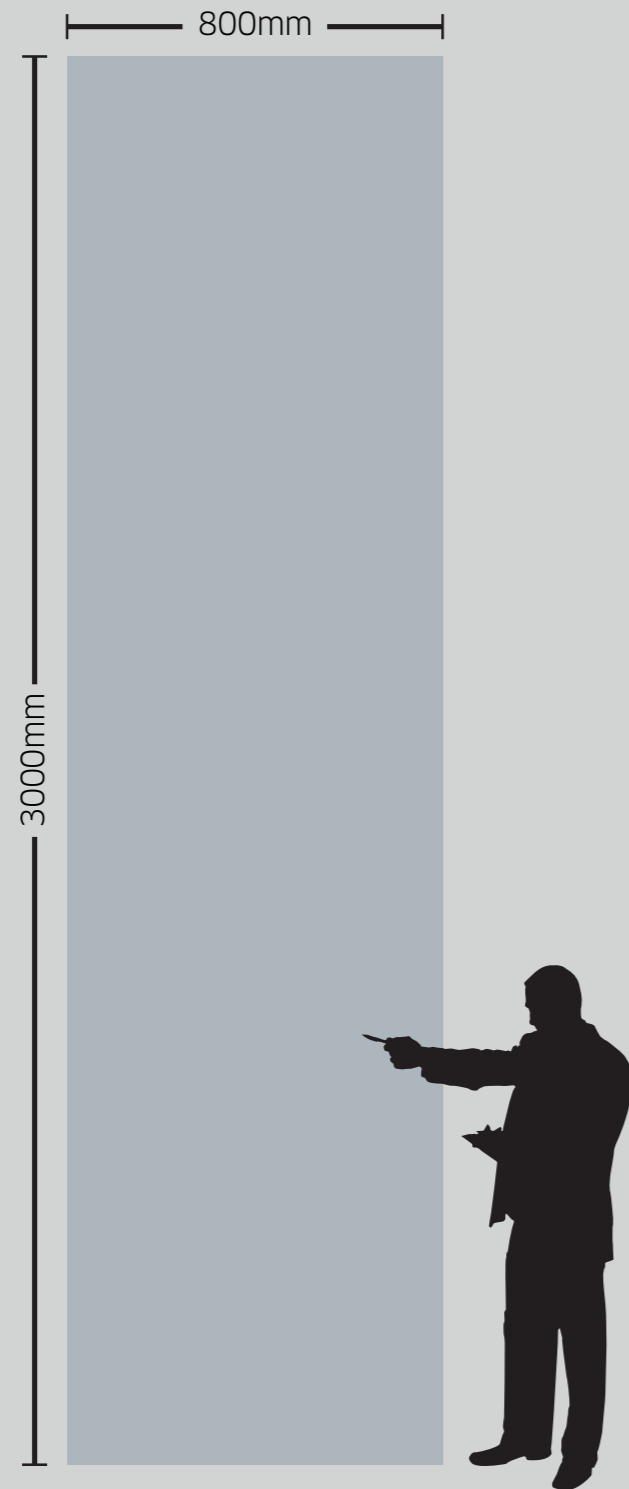

The thicknesses are one of the most important elements characterizing..

15 mm is set aside for the most demanding product applications such as kitchen countertops.


EDGE Profiles



Double straight rounded edge



Rounded straight edge




Half bullnose




Full bullnose




Demi bullnose



Micro bevel



Straight squared edge



Double straight squared edge



Rounded edge at 45°



Squared edge at 45°

Giving a nice trim to the edges of the tiles adds to its beauty.

As these tiles are of the good thickness of 15mm, it is possible to shape its edges in different styles and create aesthetically rich countertops for your space.

JOINT POSSIBILITIES



Birds beak




45° corner



Soft corner



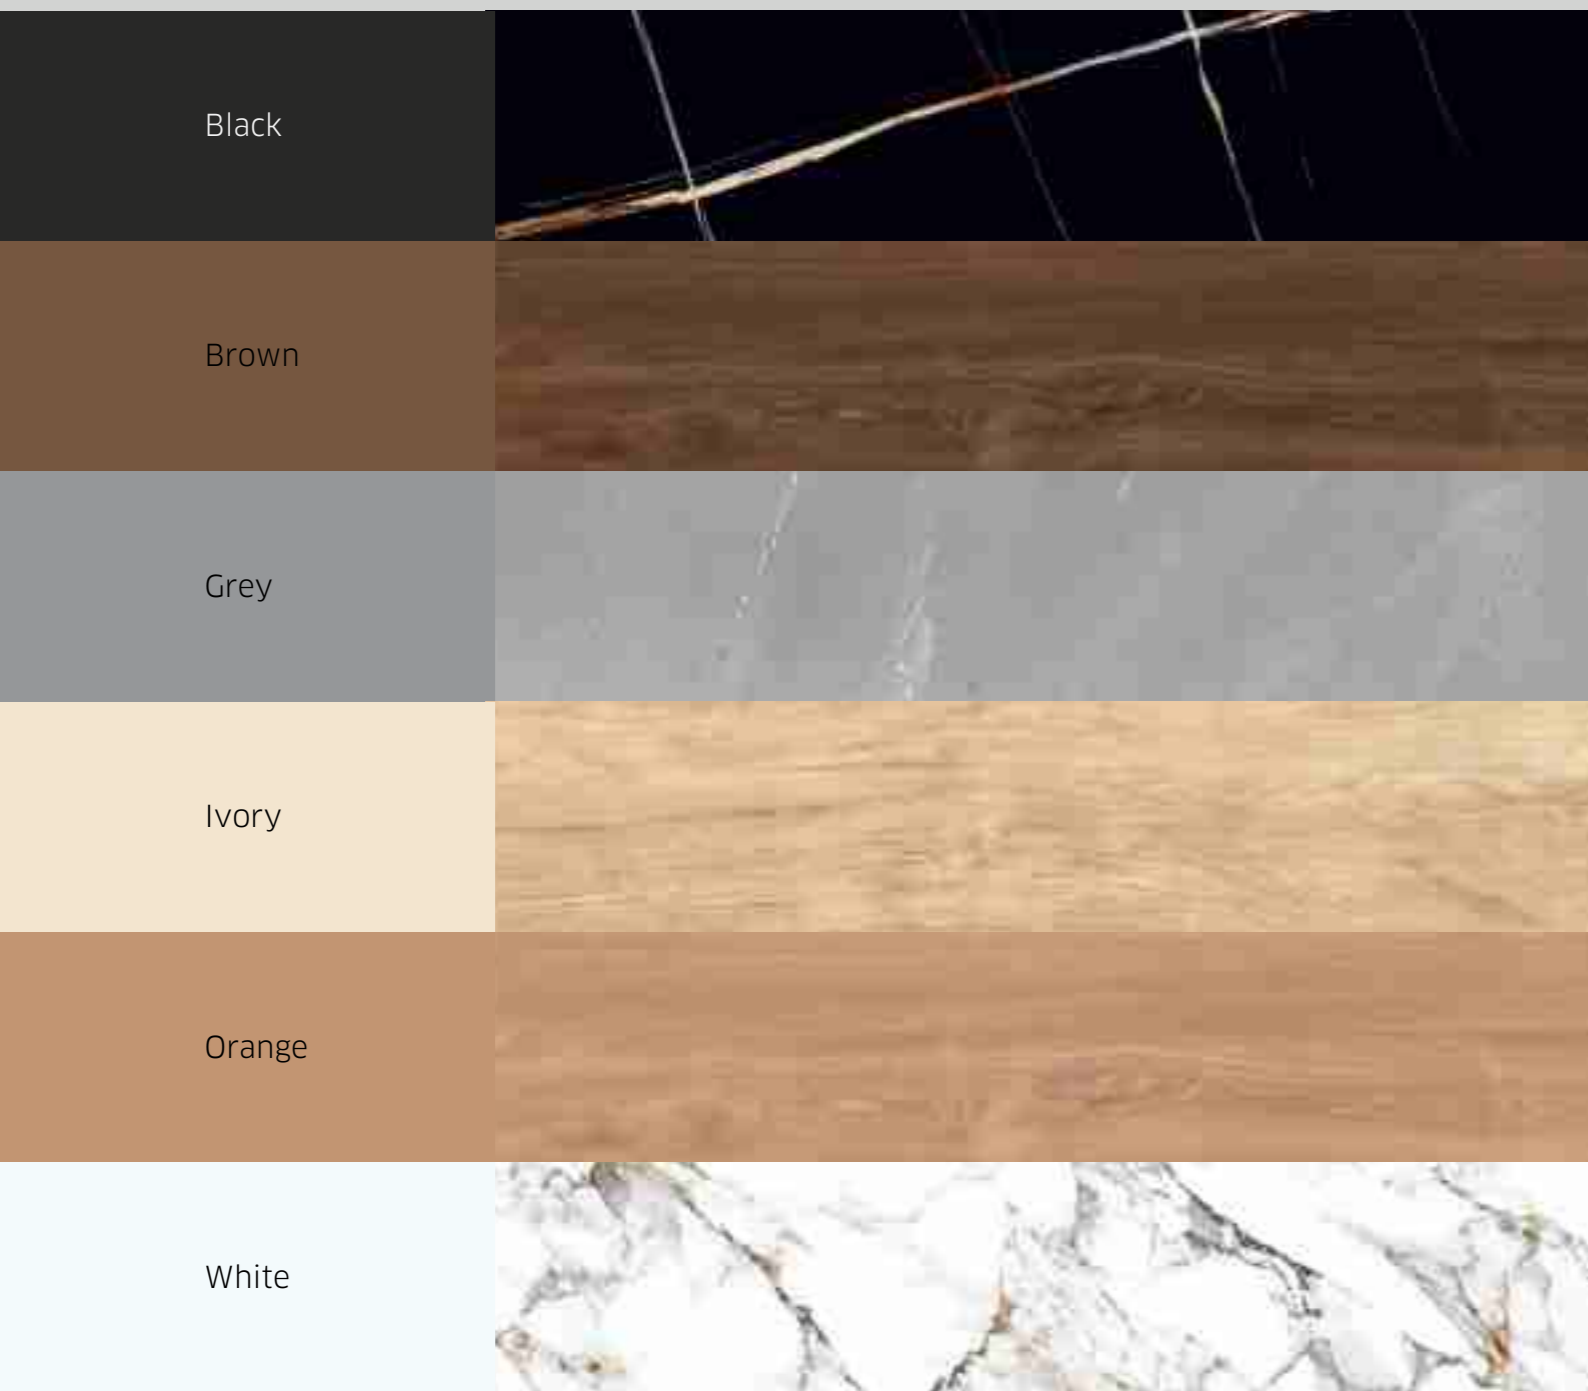


Our collections offer professional-grade performance while seamlessly blending the latest innovations with a premium design aesthetic that is crafted with authentic, high-quality materials.

The Functionality of
The Residential Kitchen

Elevating Classic Style
for Today's Homeowner

Leading Edge Design
and Innovation

PRODUCT Range

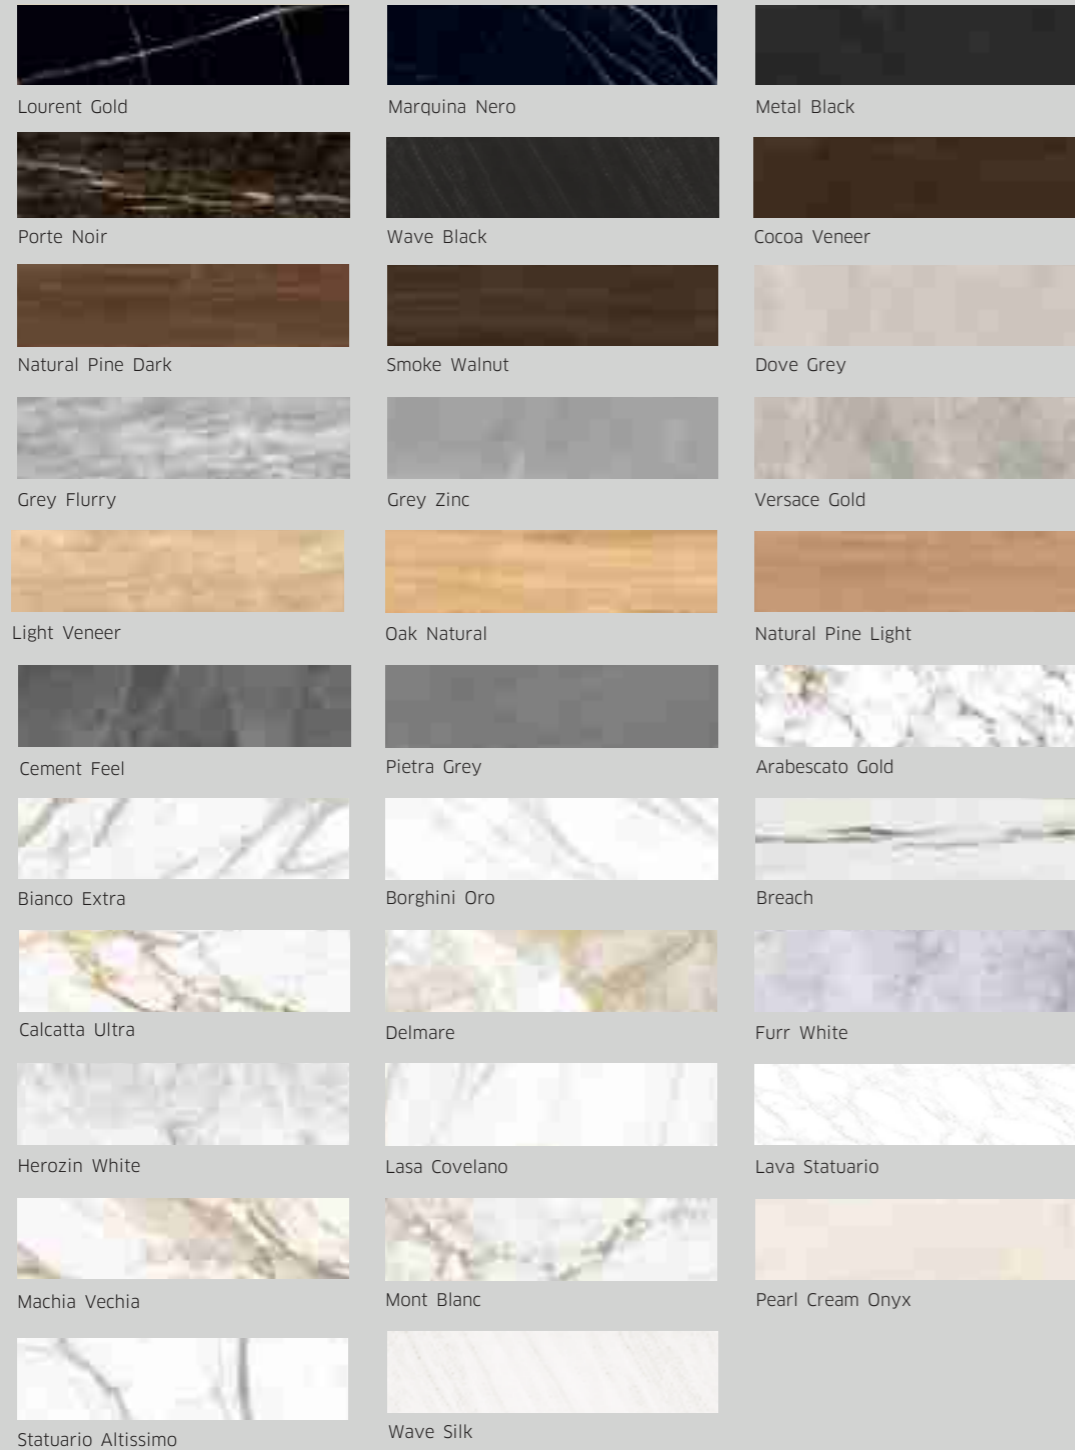

PRODUCT Finishes

FEEL

A matte finish with a light layer of enamel for subtle shine and a pleasantly soft touch. Surface finish which is easy to clean.



APPLICATION Areas

KITCHEN COUNTERTOP



DINING TABLE



LIVING ROOM



FURNITURE



STAIRCASE



OFFICE TABLE



TABLE TOP



DOOR \ WINDOW
FRAME



TECHNICAL Features

LIGHTWEIGHT



WATERPROOF



RESISTANT TO SCRATCHES



RESISTANT TO HIGH
TEMPERATURES



EASY TO CLEAN



RESISTANT TO BENDING



100% NATURAL



RECYCLABLE



HYGIENIC



RESISTANT TO UV RAYS





LOURENT GOLD

BODY
BLACK BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



MARQUINA NERO

BODY
BLACK BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



METAL BLACK

BODY
BLACK BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



PORTE NOIR

BODY
BLACK BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



WAVE BLACK

BODY
BLACK BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



COCOA VENEER

BODY
BROWN BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



NATURAL PINE DARK

BODY
BROWN BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



SMOKE WALNUT

BODY
BROWN BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



DOVE GREY

BODY
GREY BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



GREY FLURRY

BODY
GREY BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



GREY ZINC

BODY
GREY BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



VERSACE GOLD

BODY
GREY BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



LIGHT VENEER

BODY
IVORY BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



OAK NATURAL

BODY
IVORY BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



NATURAL PINE LIGHT

BODY
ORANGE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



CEMENT FEEL

BODY
WALL STREET GREY BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



PIETRA GREY

BODY
WALL STREET GREY BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM




ARABESCATO GOLD

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM

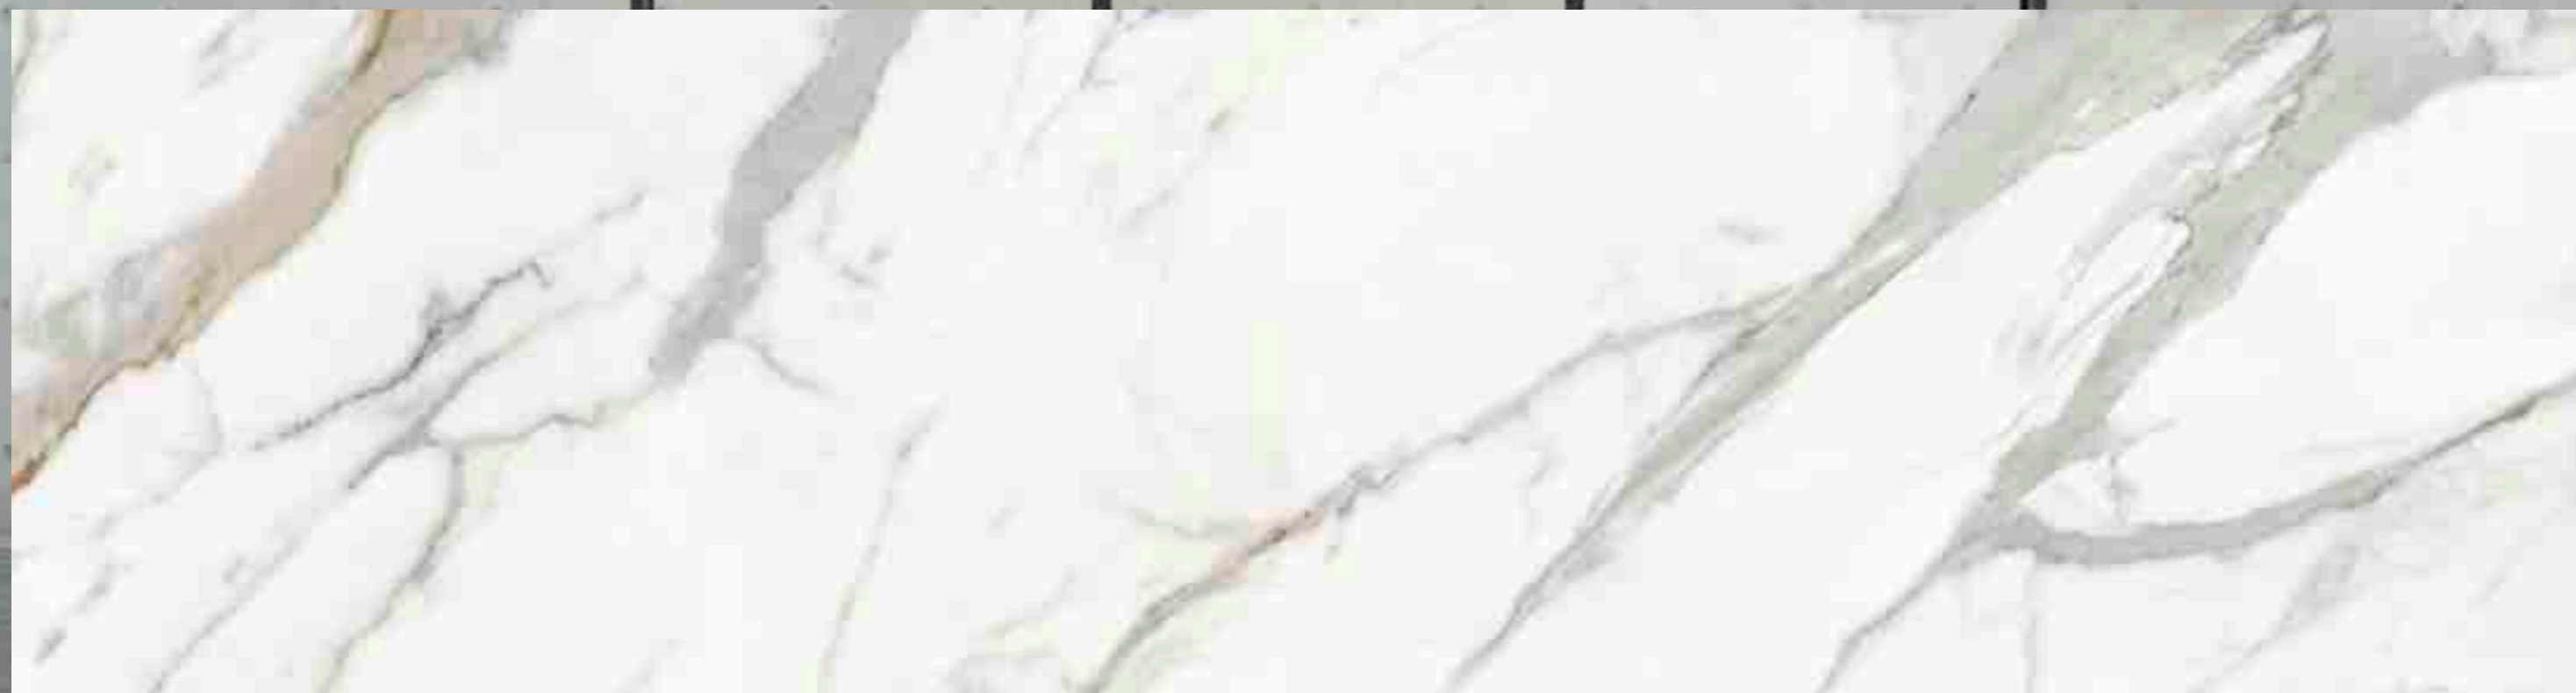

BIANCO EXTRA

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM




BORGHINI ORO

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM

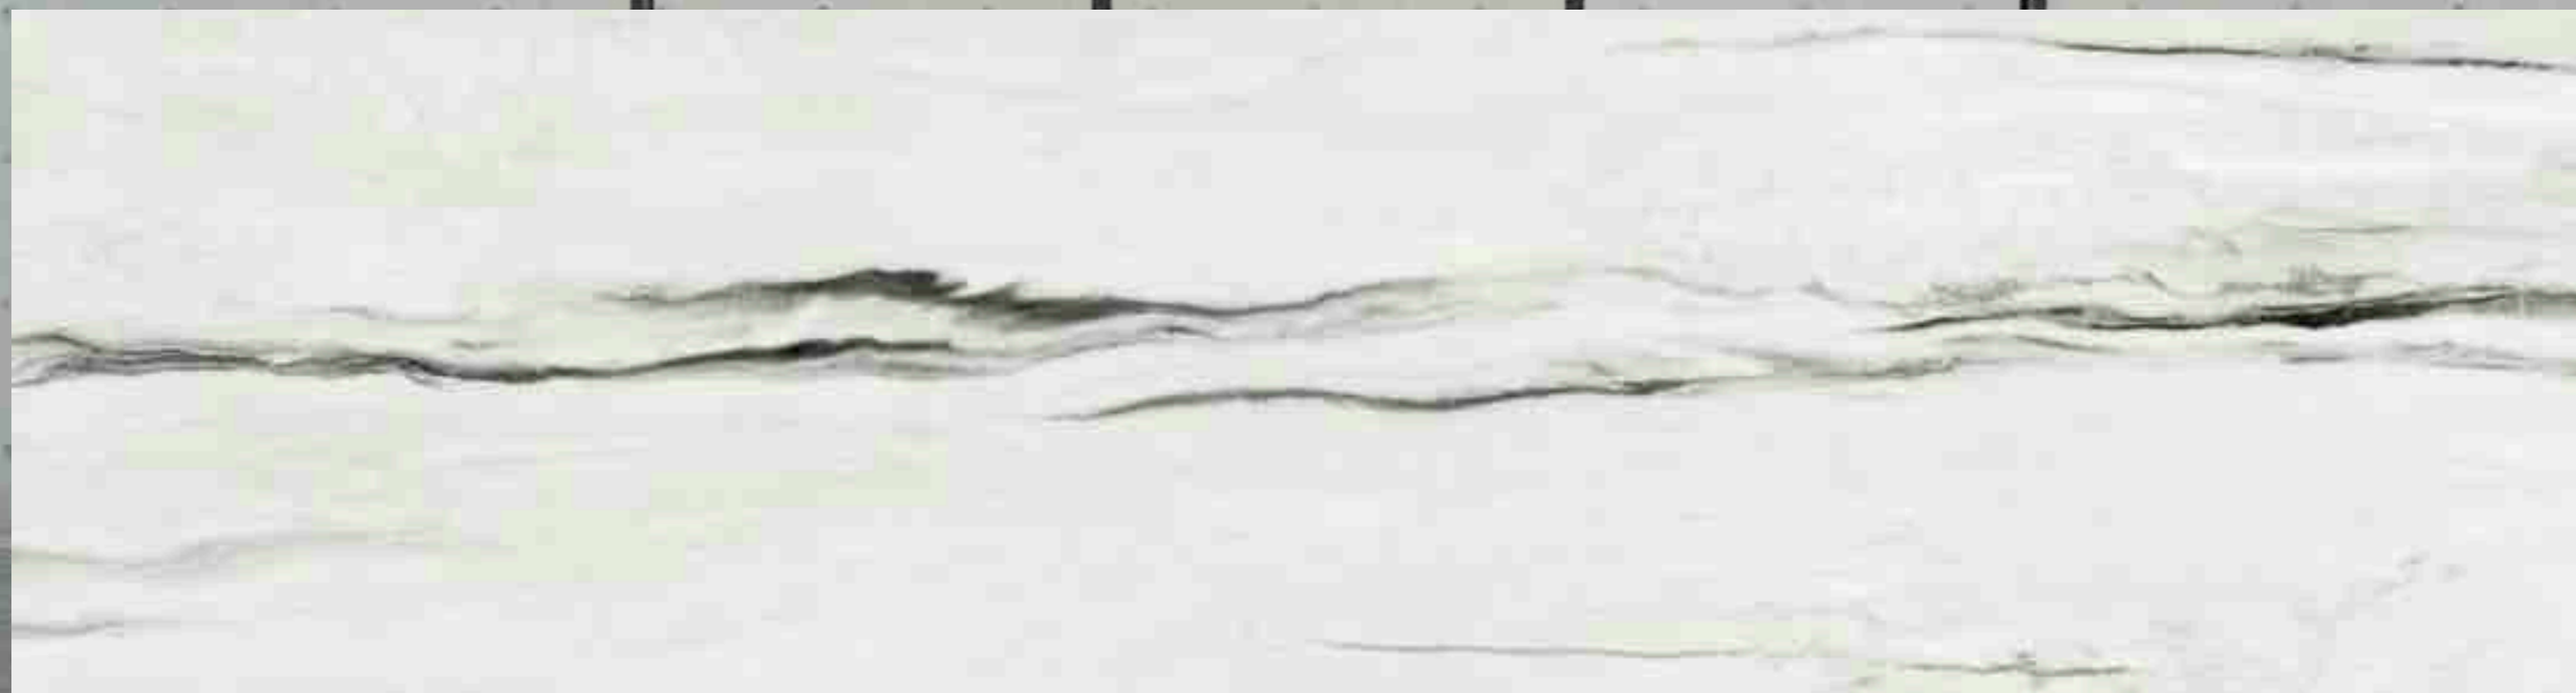

BREACH

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



CALCATA ULTRA

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



DELMARE

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



FURR WHITE

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM




HEROZIN WHITE

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM

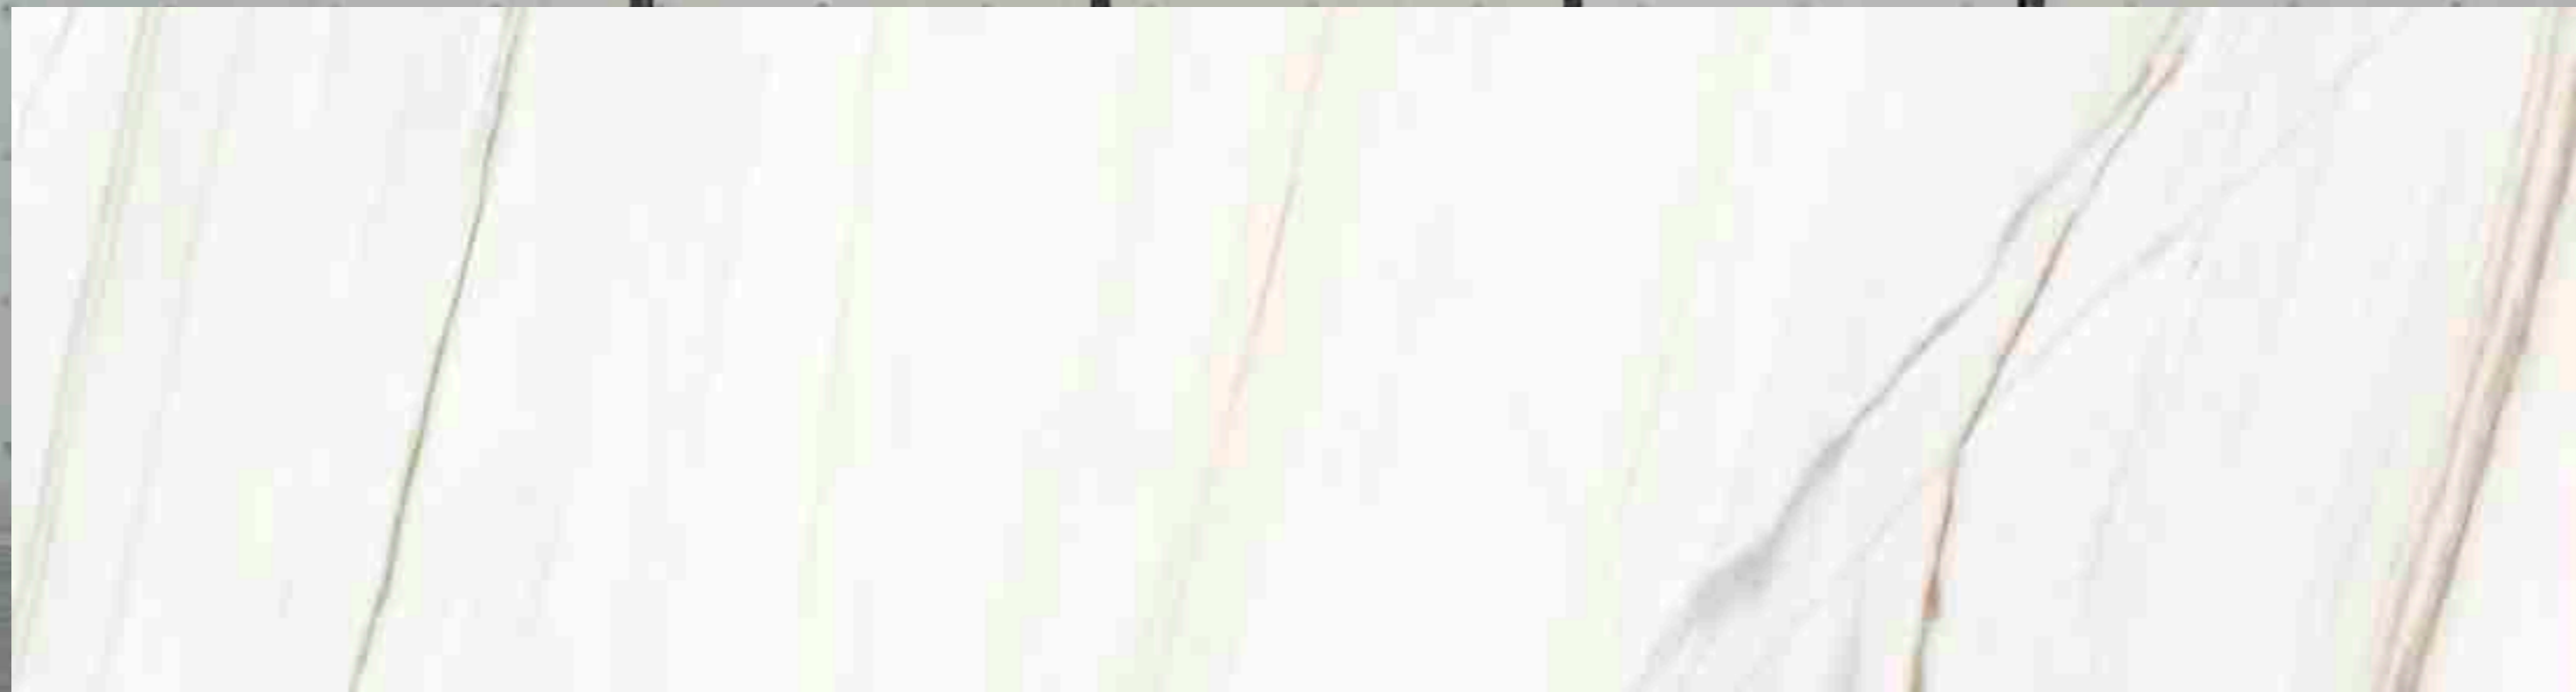


LASA COVELANO

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM

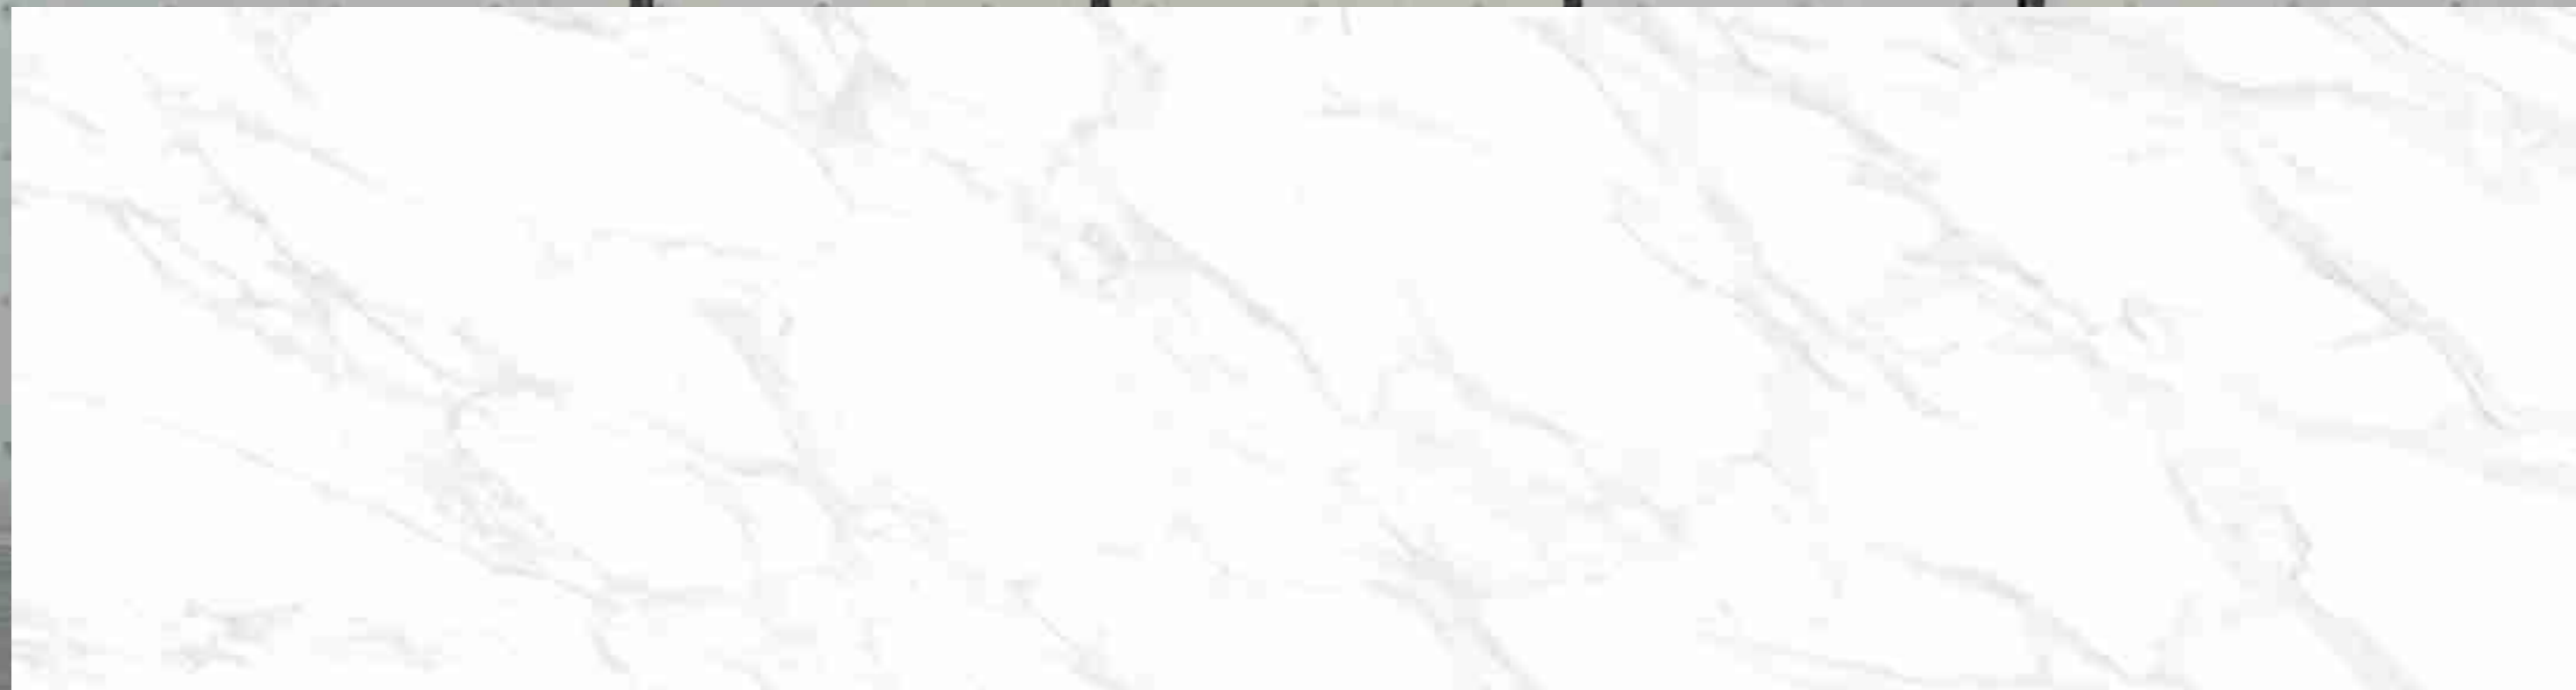

LAVA STATUARIO

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



MACHIA VECHIA

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



MONT BLANC

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



PEARL CREAM ONYX

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



STATUARIO ALTISSIMO

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM



WAVE SILK

BODY
WHITE BODY

FINISH
MATT

SIZE
800x3000 MM

THICKNESS
15 MM

Cleaning & Maintenance

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

| TYPE OF STAIN | CHEMICAL PRODUCT | EXAMPLE |
|---------------|--------------------|--|
| Grease | Alkaline - Solvent | Detergent |
| Oil | Solvent | Ammonia, Backing Soda |
| Ink | Oxidant - Solvent | Alcohol, Liquid Bleach, Nail Paint Remover |
| Rust | Acid | Hydrochloric Acid, Vinegar, Red Harpic |
| Lime | Acid | Descaling Reagent, Hydro Chloric Acid |
| Cement | Acid | Hydro Chloric Acid |
| Wine | Alkaline | Ammonia, Liquid Bleach |
| Coffee | Alkaline - Solvent | Ammonia, Liquid Bleach |
| Rubber | Solvent | Alcohol, Thinner |
| Plaster | Acid | Hydro Chloric Acid |
| Candle Wax | Solvent | Alcohol, Thinner |
| Iodine | Oxidant | Liquid Bleach |
| Blood | Oxidant | Liquid Bleach |
| Ice Cream | Alkaline | Liquid Bleach |

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

Technical Specification

| CHARACTERISTIC | STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla | MEAN VALUE | TEST METHOD |
|--|---|---|-----------------|
| Regulatory Properties | | | |
| Deviation in Length and Width | ± 0.30 % (±1.00mm) | ± 0.10 % | ISO 10545-2 |
| Deviation in Thickness | ± 5.00 % (±0.50mm) | ± 5.00 % | ISO 10545-2 |
| Straightness in Side | ± 0.30 % (±0.80mm) | ± 0.10 % | ISO 10545-2 |
| Rectangularity | ± 0.30 % (±1.50mm) | ± 0.10% | ISO 10545-2 |
| Surface Flatness Central Curvature | ± 0.40 % (±1.80mm) | ± 0.50 % | ISO 10545-2 |
| Surface Flatness Edge Curvature | ± 0.40 % (±1.80mm) | ± 0.50 % | ISO 10545-2 |
| Surface Flatness Warpage | ± 0.40 % (±1.80mm) | ± 0.50 % | ISO 10545-2 |
| Surface Quality | > 95% defects free | > 95% defects free | ISO 10545-2 |
| Small Color Difference(for Plain Colour) | ΔE < 1.00 | ΔE < 0.30 | ISO 10545-16 |
| Glossiness (Polished) | as per mfg. | Gloss Value> 90 | Gloss Meter 60° |
| Glossiness (Matt) | as per mfg. | 3 <Gloss Value<7 | Gloss Meter 60° |
| Glossiness (Satin/Posh) | as per mfg. | 7<Gloss Value<18 | Gloss Meter 60° |
| Structural Properties | | | |
| Water absorption | ≤ 0.50 % | ≤ 0.060 % | ISO 10545-3 |
| Bulk density | as per mfg. | Min. 2.28 g/cc | ISO 10545-3 |
| Massive Mechanical Properties | | | |
| Modulus of rupture | Min. 35.0 N/mm ² | Min. 42.0 N/mm ² | ISO 10545-4 |
| Breaking strength thickness <7.5 | Min. 700.0 N | Min. 1000.0 N | ISO 10545-4 |
| Breaking strength thickness ≥7.5 | Min. 1300.0 N | Min. 1800.0 N | ISO 10545-4 |
| Breaking strength thickness ≥7.5mm) | Min. 1300.0 N | Min. 7500.0 N | ISO 10545-4 |
| Surface Mechanical Properties | | | |
| MOH'S hardness # | as per mfg. | Glossy Min. 4*/ Posh Min. 6 | BS EN 15771 |
| Surface abrasion resistance # | as per mfg. | Glossy Min. 2/ Posh Min. 3 | ISO 10545-7 |
| Deep abrasion resistance # | Max. 175m ³ m | Max. 132m ³ m | ISO 10545-6 |
| Thermal Hydrometric Properties | | | |
| Moisture expansion | Max. 0.06%(0.6mm/m) | Max. 0.02mm/m | ISO 10545-10 |
| Thermal expansion(COE) at 100°C | as per mfg. | Max. 6.0 x 10 ⁻⁶ | ISO 10545-8 |
| Thermal shock resistance | Min. 10 Cycle | Min. 10 Cycle | ISO 10545-9 |
| Impact resistance(COR) # | Min. 0.55 | Min. 0.55 | ISO 10545-5 |
| Frost resistance | as per mfg. | Frost Proof | ISO 10545-12 |
| Chemical Properties | | | |
| Resistance to staining glazed | Min. Class 3 | Min. Class 4 | ISO 10545-14 |
| Resistance to household chemicals & swimming pool salts glazed | Min. Class GB | Min. Class GA | ISO 10545-13 |
| Resistance to low concentrate acid and alkalis glazed | as per mfg. | Min. Class GLB** | ISO 10545-13 |
| Resistance to high concentrate acid and alkalis glazed | as per mfg. | Min. Class GHB** | ISO 10545-13 |
| Safety Properties | | | |
| Skid resistance(DCOF-DRY) ## | as per mfg. | Glossy P0(< ¹²) / Posh ≥P1(¹² - ²⁴) | BS 7976-2 |
| Slip resistance(DCOF)(R value) ## | as per mfg. | R9 to R ¹³ | DIN 51130 |
| Fire resistance | as per mfg. | Fire Proof | N.A. |

* With Nano polished
 ** Except Hydrofluoric Acid & it's compound
 # Tiles Intended for use on floor
 ## As per customer requirement

Packing Details

| PRODUCT | BODY | SIZE | THICKNESS | TILES / BOX | COVERAGE AREA / BOX | WEIGHT (Kgs) |
|---------|------------|------------|-----------|-------------|---------------------|--------------|
| Matt | Color Body | 800x3000mm | 15mm | 1pc | 25.83 Sq ft | 84 Kgs |